TopsideHooks[™]

Manufactured by Nautilus Rigging LLP



Type Approved

High grade

80 alloy steel.

Technically advanced design with proven safety benefits, sets the new standard in safety hooks.

Key Benefits and Safety Features

- Unique integral safety handle, eliminating pinch and trap injuries
- Protected dual sided locking slide, eliminates external lock protrusions
- Unique internal load bearing profile, for quick and easy load or discharge

Dacromet® coated

locking slide for added protection

Clearly marked

working load limit

Available with clevis,


eye or swivel tops

Manufacturers code

for simple traceability

UK and International

patents pending for design and operation

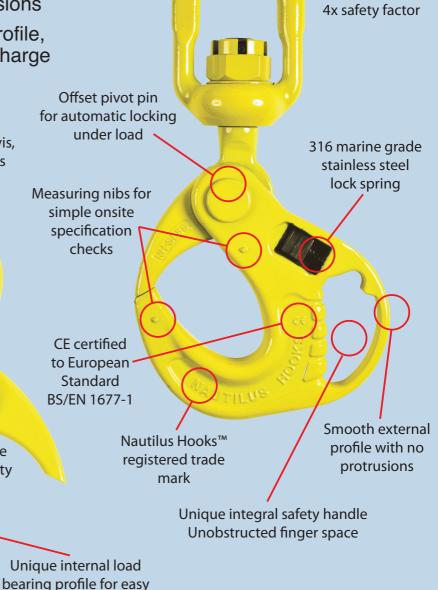



load and discharge

of hook

-

Nautilus Hooks™ The New Standard for Safety


CE Certified and DNV type approved.

Nautilus Hook



We make the Hook

Traditional Hook



You make the Choice

Nautilus Hooks[™] are the cost effective solution to eliminating serious, and potentially costly, pinch and trap hand injuries during lifting operations. A revolutionary new design, Nautilus Hooks, incorporate unique safety features that eliminate the inherent hazards of traditional hooks and set a new global safety standard across a broad range of industries and applications including:



Nautilus Hooks Multi Leg Chain Assemblies

- Construction
- Mining
- Mobile Cranes
- ▶ Tower Cranes



Nautilus Hooks Wire Rope Pennants

- ▶ Offshore Platforms
- ▶ Mobile Drilling Rigs
- Shipping
- ▶ Port Services

Nautilus Hooks™ - Model Range and Codes

WWL (x 1000kg)	4 tonne	6 tonne	8 tonne	10 tonne	12.5 tonne	16 tonne	20 tonne
Swivel Top	NH-SL4S	NH-SL6S	NH-SL8S	NH-SL10S	NH-SL12.5S	NH-SL16S	NH-SL20S
Clevis Top	NH-SL4C	NH-SL6C	NH-SL8C	NH-SL10C	NH-SL12.5C	-	-
Eye Top	NH-SL4E	NH-SL6E	NH-SL8E	NH-SL10E	NH-SL12.5E	NH-SL16E	NH-SL20E

- ► Nautilus Hooks[™] are manufactured to EU standard BS/EN 1677-1+A1/2008
- ▶ Comply with DNV standard for certification 2.22 lifting Appliances 2008.
- ▶ Individually proof tested to 2.5 x Working Load Limit prior to shipment.
- ▶ Nautilus Hooks are fatigue rated to 20,000 cycles at 1.5 x the working load limit.
- ▶ Patented Nautilus Design USA Patent Number US 8,240,727 B2

Distributed by



NautilusRigging

23E Burnside Drive, Dyce Aberdeen, United Kingdom AB21 0HW

T: + 44 (0)1224 772323 E: info@nautilusrigging.com www.nautilusrigging.com

