



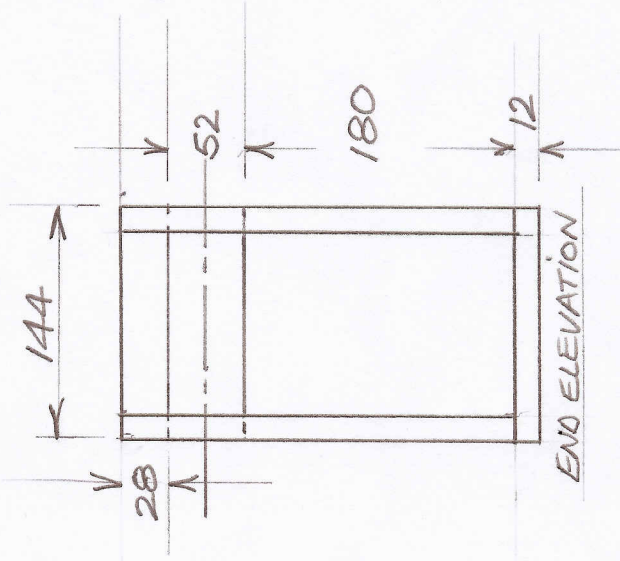

Nautilus Rigging - Minimum specifications for Subsea Lifting Points compatible with Nautilus Sub sea Hooks.

1. Recessed lifting box - Compatible with Models NH-ROV22E and NH-SS22E Nautilus Hooks (SWL 22 Tonnes)

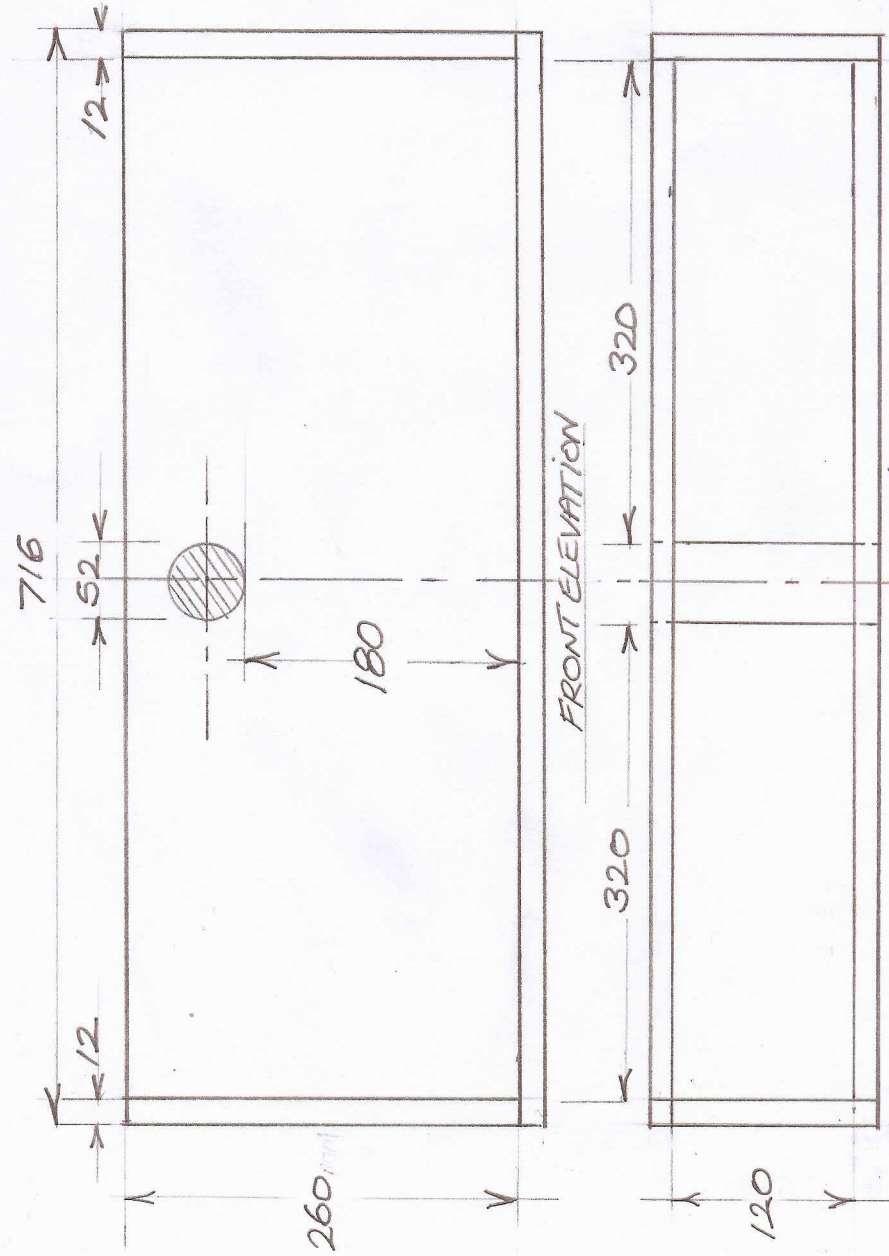

NOTE: CRITICAL DIMENSIONS

1. MAXIMUM ROUND BAR DIA 52mm.
2. MINIMUM UNDE BAR CLEARANCE 180mm.
3. MINIMUM CLEARANCE BETWEEN ROUND BAR AND END PLATES 320mm.

TOP ELEVATION


Copyright Nautilus Rigging LLP 2012.

**Nautilus Rigging LLP**  
T: 01224772323  
E: sales@nautilusrigging.com  
www.nautilusrigging.com

23E Burnside Drive  
Dyce, Aberdeen  
UK, AB21 0HW  
LLP No. S0302508  
VAT No. 977 282 962

Nautilus Rigging - Minimum specifications for Subsea Lifting Points compatible with Nautilus Sub sea Hooks.

2. Saddles and Pad Eyes - Compatible with Models NH-ROV22E and NH-SS22E Nautilus Hooks (SWL 22 Tonnes)

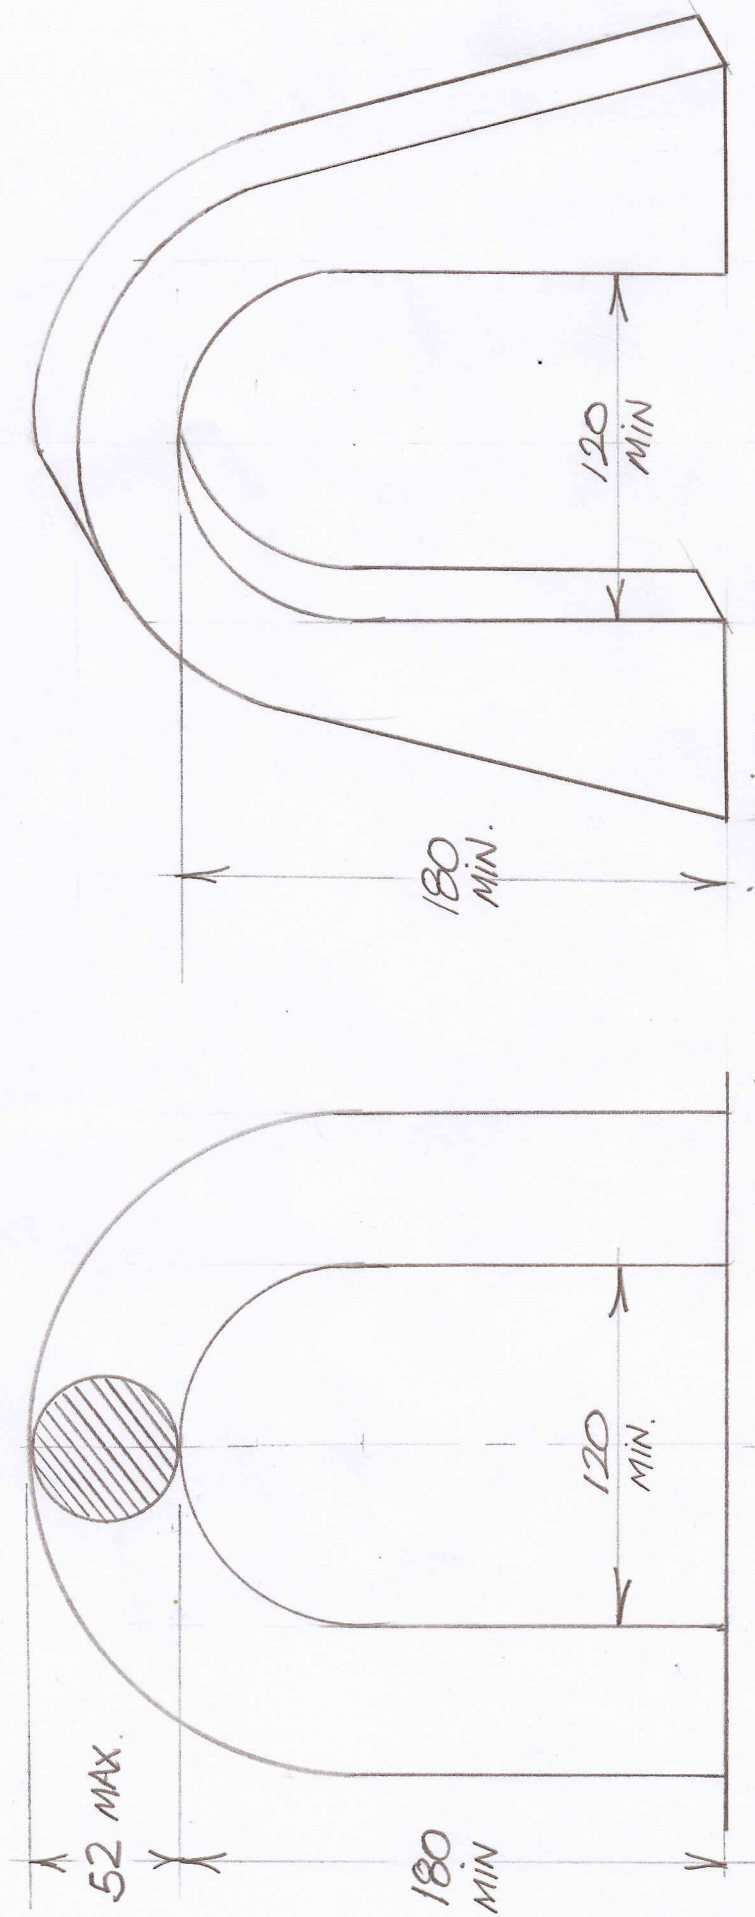

NOTE: CRITICAL DIMENSIONS

1. MAX ROUND BAR DIA 52MM
2. MINIMUM SADDLE HEIGHT 180MM
3. MINIMUM SADDLE WIDTH 120MM.

Copyright Nautilus Rigging LLP 2012.

Nautilus Rigging LLP

T: 01224772323

E: sales@nautilusrigging.com

www.nautilusrigging.com

23E Burnside Drive

Dyce, Aberdeen

UK, AB21 0HW

LLP No. S0302508

VAT No. 977 282 962